

# TPP

## SMALL HEAD SCREW


- The reduced head with a 60° angle ensures a concealed effect and easy insertion even in small thickness, without creating openings in the timber
- Ideal for use in joints to secure beads or small elements
- Made of carbon steel with bright zinc plating



**MATERIAL:** carbon steel with bright zinc plated




**A** maximum fastening thickness

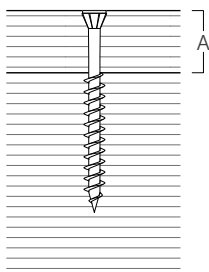

d <sub>1</sub> [mm]	d <sub>k</sub> [mm]	CODE	L [mm]	b [mm]	A [mm]	pcs
3,5 TX 10	5,75	TPP3530	30	20	10	500
		TPP3540	40	26	14	500
		TPP3550	50	34	16	500
		TPP3560	60	40	20	500

## GEOMETRY

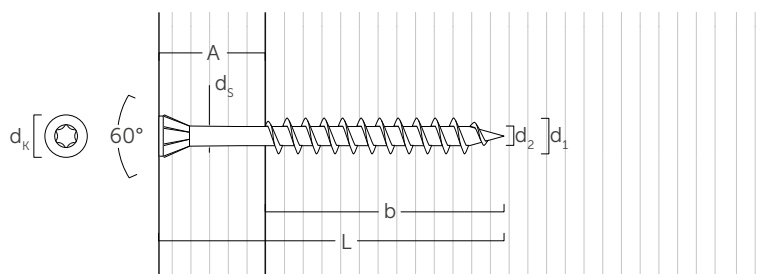

<b>nominal diameter</b>	<b>d<sub>1</sub></b>	<b>[mm]</b>	<b>3,5</b>
head diameter	d <sub>k</sub>	[mm]	5,75
thread diameter	d <sub>2</sub>	[mm]	2,30
shank diameter	d <sub>s</sub>	[mm]	2,65
head thickness	t <sub>1</sub>	[mm]	4,00
pre-drilling hole diameter <sup>(1)</sup>	d <sub>v</sub>	[mm]	2,0

<sup>(1)</sup> Pre-drilling valid for softwood.